DATA SHEET

VARNALUX

LED TRI-PROOF 50W DALI


SR05 | 150 CM | DALI DIMMABLE | 26-50W SWITCH | CONNECTABLE



APPLICATION

- Garages and car parking
- Factories and warehouses
- Process areas and plant rooms
- Wine cellars and cheese dairies
- Textile and paper processing plants
- Agricultural buildings and transport terminals

AVAILABLE MODELS	
Color Temp	REF No
4000K	200044
6000K	200045

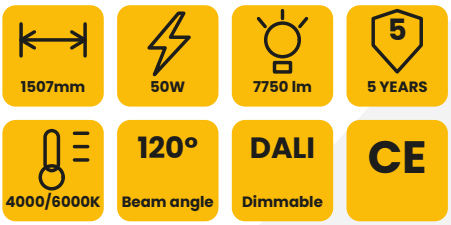





DATA SHEET

VARNALUX

LED TRI-PROOF 50W DALI

SR05 | 150 CM | DALI DIMMABLE | 26-50W SWITCH | CONNECTABLE

ELECTRICAL DATA	
Wattage (Consumption)	50W
Power adjustment	26-50W (switch)
Dimming	DALI dimmable

PHOTOMETRICAL DATA	
Temperature (Kelvin)	4000K or 6000K
Light color	Neutral or cool white
Luminous efficiency	155 lm/W
Lumen	7750 lm
Beam angle	120°
Color Rendering Index (CRI)	> 80
LED brand	Sanan

CAPABILITIES	
Dimmable	Yes, DALI
Driver	Lifud (DALI dimmable)
Linkable	Yes


LIFESPAN & WARRANTY	
Warranty	5 years


DIMENSIONS & PACKAGING	
Dimensions	1507 x 91 x 78 mm
Fixing hole centre	1065 mm

ADDITIONAL INFORMATION	
LED Chip	Sanan
Driver	Lifud, DALI

AVAILABLE MODELS

Color Temp	REF No
4000K	200044
6000K	200045

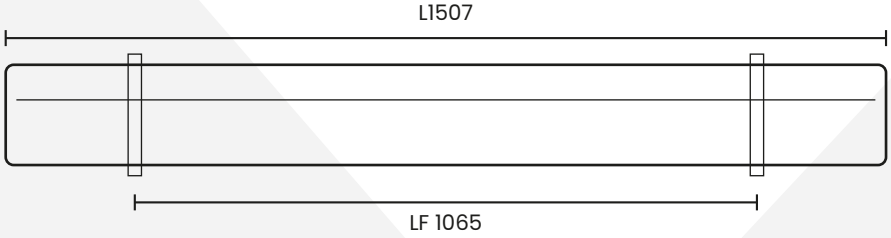



Schematic drawing, not to scale. Dimensions in mm.

DATA SHEET

VARNALUX

LED TRI-PROOF 50W DALI

SR05 | 150 CM | DALI DIMMABLE | 26-50W SWITCH | CONNECTABLE

USER MANUAL | HOW TO USE

STEP 1 **Turn off the power**

Switch off the mains supply (picture A). Electrical installation must be done by a registered electrician only.

STEP 2 **Drill the holes**

Drill Ø6 mm holes according to the fixing hole centre (LF): 280 mm for 60 cm, 765 mm for 120 cm, 1065 mm for 150 cm (picture B-1).

STEP 3 **Fix the mounting brackets**

Insert Ø6 mm expansion pipes in the wall and fix the mounting brackets with M4 screws (picture B-2).

STEP 4 **Open the luminaire**

Open the clips (a), take off the diffuser (b), then hold the stainless fixator and take off the gear tray (c) (picture C).

STEP 5 **Connect the cable**

Loosen the nut of the cable gland, put the cable through it and connect the cable to the terminal block as shown (cable 4 x 0.5 mm², picture D).

STEP 6 **Close the luminaire**

Tighten the cable gland, fix the gear tray with the housing and close the diffuser (picture E).

STEP 7 **Fix the lamp**

Fix the lamp on the wall or ceiling and secure it with the lock screws (picture F).

STEP 8 **Turn on the power**

Turn on the power (picture G). Never touch the lamp while it is switched on.

DATA SHEET

LED TRI-PROOF 50W DALI

SR05 | 150 CM | DALI DIMMABLE | 26-50W SWITCH | CONNECTABLE

CONNECTION DIAGRAM



Connect the supply cable (4 x 0.5 mm²) to the terminal block as shown in the supplier drawing (picture D).

SAFETY NOTICE:

- Electrical installation must be done by a registered electrician only.
- Switch off the power supply before installation. Before replacing the driver, disconnect the luminaire from the supply and let it cool down.
- Never touch the lamp while the luminaire is switched on.
- In case of any malfunction disconnect the luminaire from the supply immediately. Do not try to repair it yourself: repair must be done by a registered electrician or an official service agent.
- If there is any damage on the power line or the shell, the product must not be used. Use the light out of its package and check it for transport damage.
- Never cover the lights by other objects and never allow the light to come into contact with open flames or external heat sources.
- Avoid looking directly into the LED beam, especially for extended periods. Do not shine the light in another person's eyes.
- Keep packaging material away from children and pets (risk of suffocation, small parts).
- After its service life the product needs an inspection or special treatment for disposal.