DATA SHEET

VARNALUX

LED RECESSED SPOTLIGHT 5W

NON-DIMMABLE | CUTOUT Ø70 MM | 425 lm | 60° | 2700-6000K



APPLICATION

- Restaurants and shops
- Museums and exhibition halls
- Conference rooms
- Warehouses
- Home lighting

AVAILABLE MODELS	
Color Temp	REF No
2700K	200187
4000K	200189
6000K	200191

Ø85mm	5W	425 lm	3 YEARS
2700-6000K	NON-DIM Dimming	60° Beam angle	Ø70 Cutout (mm)



DATA SHEET

VARNALUX

LED RECESSED SPOTLIGHT 5W

NON-DIMMABLE | CUTOUT Ø70 MM | 425 lm | 60° | 2700-6000K

GENERAL	
Product size (diameter)	85mm
Dimensions	Ø85 x H55 mm
Cutout	70mm
Weight	0.25 kg

ELECTRICAL DATA	
Power (consumption)	5W
Input voltage	100-240V AC, 50/60H
Max. current	0.06A
Power factor	> 0.9
Driver	Varnalux driver (separate from the lamp body)
Dimming	Non-dimmable


PHOTOMETRICAL DATA	
Colour temperature (Kelvin)	2700K / 4000K / 6000K
Luminous flux	2700K: 375 lm, 4000K: 400 lm, 6000K: 425 lm
Colour rendering index (CRI)	> 80
LED brand	Sanan
Beam angle	60°
LED type	COB LED

LIFESPAN & WARRANTY	
Warranty	3 years

ADDITIONAL INFORMATION	
Housing	Aluminium-magnesium alloy + tempered glass

AVAILABLE MODELS

Color Temp	REF No
2700K	200187
4000K	200189
6000K	200191



Cutout Ø70 mm

Schematic drawing, not to scale. Dimensions in mm.

DATA SHEET

VARNALUX

LED RECESSED SPOTLIGHT 5W

NON-DIMMABLE | CUTOUT Ø70 MM | 425 lm | 60° | 2700-6000K

INSTALLATION

STEP 1 **Unpack and check**

Check the integrity of the product when unpacking. Installation must be done by a professional.

STEP 2 **Turn off the power**

Power must be cut off before installation. Make sure the switch is off before connecting to the power supply.

STEP 3 **Make a hole**

Make a hole of Ø70 mm in the ceiling (picture step 1).

STEP 4 **Connect the power wire**

Connect the power wire to the driver (picture step 2). The connection of the power supply must be sealed.

STEP 5 **Push the spring**

Push the spring(s) of the lamp body to the side (picture step 3).

STEP 6 **Insert the lamp**

Put the lamp into the hole (picture step 4) and release the springs.

STEP 7 **Dimming**

Non-dimmable version: do not use the lamp on a dimmer circuit.

STEP 8 **Switch on**

Switch on the power supply and check the light output.

PACKING INFO


In the box	1 x lamp body, 1 x driver (separate)

DATA SHEET

LED RECESSED SPOTLIGHT 5W

NON-DIMMABLE | CUTOUT Ø70 MM | 425 lm | 60° | 2700-6000K

CONNECTION DIAGRAM

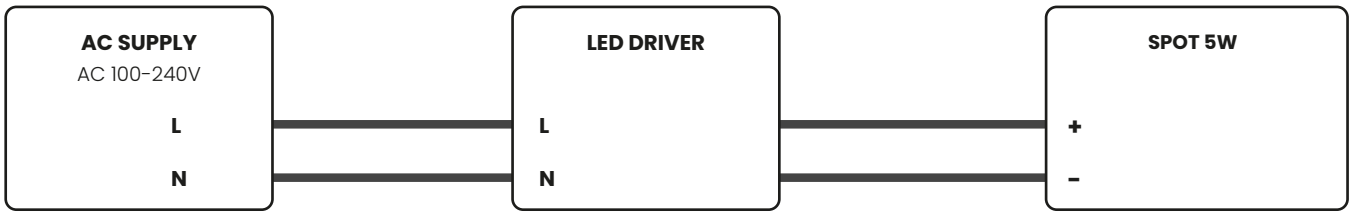

Non-dimmable version: do not use on a dimmer circuit.

SAFETY NOTICE:

- Read the specification first and make sure the service environment matches the conditions in the specification before using.
- Confirm the applicable power supply before using.
- Make sure the switch is off before connecting to the power supply, to prevent electric shock.
- Operation against the rules may damage your property and even harm your personal safety.
- Preliminarily estimate the required quantity of lights and, from the power rating of a single light, the total power and the power supply plan.
- Dangerous high voltage: non-professionals are not allowed to maintain the product. A damaged exterior flexible cable or wire must be exchanged by the supplier, its agent or similarly qualified personnel.