DATA SHEET

VARNALUX

LED T8 NANO TUBE 150CM 24W

PC TUBE | 120 LM/W | 2880 LM | G13



APPLICATION

- Residential spaces
- Commercial spaces
- Utility areas

AVAILABLE MODELS


Color Temp	REF No
3000K	100161
4000K	100162
6000K	100163



KEY FEATURES

- 2880 lm at 120 lm/W from 24W
- Sanan LEDs, 120° beam angle
- Flicker-free, non-dimmable
- Starter included
- PC tube with G13 base
- 3 years warranty

COLOUR TEMPERATURE

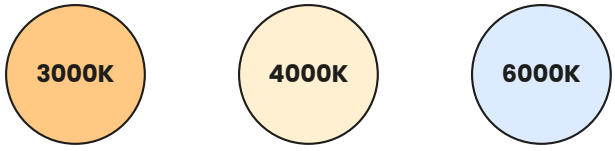

Warm white
REF 100161

Neutral white
REF 100162

Cool white
REF 100163

DATA SHEET

VARNALUX

LED T8 NANO TUBE 150CM 24W

PC TUBE | 120 LM/W | 2880 LM | G13

ELECTRICAL DATA	
Wattage (Consumption)	24W
Voltage	AC 200-240V
Max. current	0.2A
Operating voltage	DC 171V
Constant current	125mA
Power Factor	≥0.5

PHOTOMETRICAL DATA	
Temperature (Kelvin)	3000K / 4000K / 6000K
Light color	Warm, neutral or cool white
Luminous flux	2880 lm
Luminous efficiency	120 lm/W
Beam angle	120°
Color Rendering Index (CRI)	>80 Ra
LED type	SMD2835
LED quantity	120 PCS

CAPABILITIES	
Dimmable	No
Flicker-free	Yes
Starter included	Yes
Structure type	Non-rotatable


LIFESPAN & WARRANTY	
Lifespan	30,000 Hours
Warranty	3 years

DIMENSIONS	
Nominal length	1500 mm
Base	G13

ADDITIONAL INFORMATION	
LED brand	Sanan
Material	PC (Polycarbonate)
IP Rating	IP20
Operating temp.	-20°C to +50°C
Storage temp.	-30°C to +60°C
Humidity (oper.)	10-80% RH
Humidity (stor.)	10-90% RH

AVAILABLE MODELS

Color Temp	REF No
3000K	100161
4000K	100162
6000K	100163



Schematic drawing, not to scale. Dimensions in mm.

DATA SHEET

VARNALUX

LED T8 NANO TUBE 150CM 24W

PC TUBE | 120 LM/W | 2880 LM | G13

USER MANUAL | HOW TO USE

STEP 1 **Unpack and check**

Take the tube out of the packaging and check it for damage. If any damage is visible, do not install or use it.

STEP 2 **Turn off the power**

Switch off the mains supply before fitting or replacing a tube. Installation must be done by a qualified person.

STEP 3 **Fit the tube**

Insert the G13 pins into the sockets of the fixture and turn the tube until it is held securely.

STEP 4 **Place the starter**

Place the supplied starter in the starter socket of the fixture.

STEP 5 **Turn on the power**

Switch on the mains supply. The tube is non-dimmable: do not use it with a dimmer.

STEP 6 **Maintenance**

Replace a damaged tube immediately. Dispose of the tube according to local regulations for electrical waste.

SAFETY NOTICE:

- Installation must be done by a qualified person only; always switch off the mains supply first.
- If the tube or its pins are damaged, the product must not be used.
- The tube is non-dimmable and must not be used with dimmers.
- IP20: for indoor use in dry locations only.
- Avoid looking directly into the LEDs for extended periods. Do not shine the light in anyone's eyes.
- Keep the tube and packaging material away from children and pets.
- Do not disassemble or modify the tube.