DATA SHEET

VARNALUX

LED SLIM DOWNLIGHT ROUND 24W

SLIM ROUND PANEL | RECESSED | TRIAC DIMMABLE | IP44




APPLICATION

- Hotels
- Factories and offices
- Commercial purposes
- Residential and institution buildings
- Schools, colleges and universities
- Hospitals

AVAILABLE MODELS	
Color Temp	REF No
3000K	100253
4000K	100255
6000K	100257

Ø294mm | 24W | 2040 lm | 3 YEARS | 3000-6000K | TRIAC Dimmable | IP44 | CE



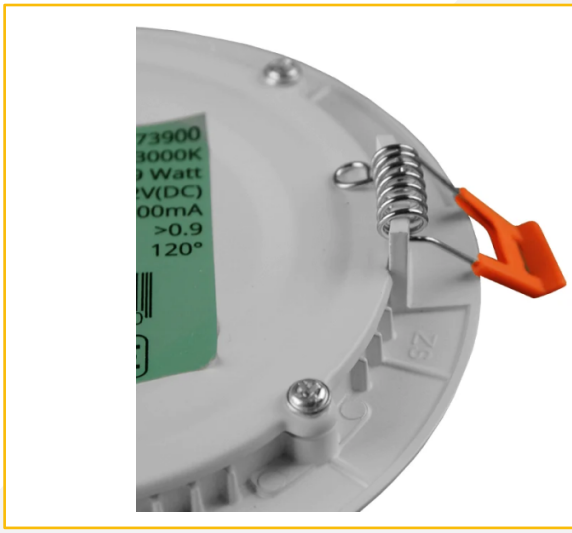

DATA SHEET

VARNALUX

LED SLIM DOWNLIGHT ROUND 24W

SLIM ROUND PANEL | RECESSED | TRIAC DIMMABLE | IP44

ELECTRICAL DATA	
Wattage (Consumption)	24W
Voltage	AC 220-240V
Frequency	50/60 Hz
Operating voltage / current	DC 36V / 560mA
Power Factor	>= 0.5
THD	< 20%
Dimming	Triac dimmable
Electrical class	Class III

PHOTOMETRICAL DATA	
Temperature (Kelvin)	3000K, 4000K or 6000K
Light color	Warm, neutral or cool white
Luminous flux	2040 lm (±5%)
Luminous efficiency	85 lm/W (±5%)
Beam angle	120°
Color Rendering Index (CRI)	> 80
LED quantity	120 pcs (2835 SMD)
Operating Temperature range	-20 °C to +50 °C


CAPABILITIES	
Dimmable	Yes, Triac dimmable
Driver	Flicker free
Mounting	Recessed, spring clip fixing


LIFESPAN & WARRANTY	
Lifespan	> 49.999 hrs
Warranty	3 years

DIMENSIONS & PACKAGING	
Dimensions	Ø294 x H14 mm
Cutout size	Ø285 mm
Net weight	0.5 kg
Inner box	1 piece
Outer box	20 pieces
Outer carton	625x300x340 mm
Carton gross weight	11 kg

ADDITIONAL INFORMATION	
LED Chip	SMD2835
IP Rating	IP44
Housing	Die-cast aluminium + PS
Certificates	CE & ROHS

AVAILABLE MODELS	
Color Temp	REF No
3000K	100253
4000K	100255
6000K	100257



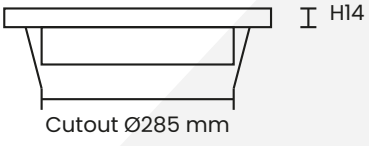

Schematic drawing, not to scale. Dimensions in mm.

DATA SHEET

VARNALUX

LED SLIM DOWNLIGHT ROUND 24W

SLIM ROUND PANEL | RECESSED | TRIAC DIMMABLE | IP44

USER MANUAL | HOW TO USE

STEP 1 **Turn off the power**

Turn off the power first to make sure the exposed power cord in the ceiling is not energized. Installation must be done by a professional electrician only.

STEP 2 **Make the ceiling hole**

Make a hole in the ceiling according to the cutout size of the lamp (Ø285 mm), as shown in picture A of the installation drawing.

STEP 3 **Fit the springs**

Flip the springs apart and snap them into the slot holes on both sides of the light fixture, as shown in figure B-1.

STEP 4 **Connect the wires**

Connect the reserved input wire (B-2) of the lamp to the reserved power wire (L, N) on the ceiling: Brown = L, Blue = N.

STEP 5 **Check the wiring**

Double check whether the wiring is correct before embedding the lamp in the ceiling.

STEP 6 **Mount the lamp**

Turn the springs upwards by 90° (figure C-1) and push the lamp upward into the mounting hole; the springs lock firmly (figure C-2).

STEP 7 **Turn on the power**

Turn on the power and the light starts to work.

STEP 8 **Maintenance**

Maintenance and repair must be done by trained professionals only. In case of damage to the power cable or the housing, stop using the luminaire.

PACKING INFO

In the box	1 x LED slim downlight with driver
Inner box	1 piece
Outer carton	20 pieces (625x300x340 mm), gross weight of carton: 11 kg


DATA SHEET

VARNALUX

LED SLIM DOWNLIGHT ROUND 24W

SLIM ROUND PANEL | RECESSED | TRIAC DIMMABLE | IP44

WIRING DIAGRAM

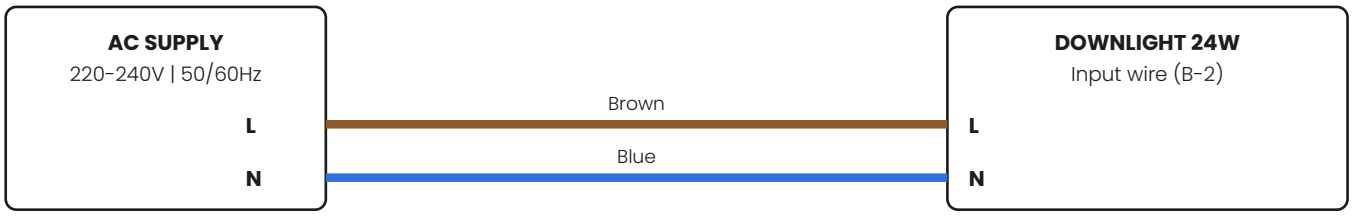

Dimmable version: use with a Triac dimmer.

SAFETY NOTICE:

- Installation must be done by a professional electrician only; non-professionals must not install, disassemble or connect wires (high voltage).
- Before installation disconnect the power supply and never work with the power on.
- If there is any damage on the power line or the shell, the product must not be used.
- Use the light out of its package and check it for transport damage before installation.
- Never cover the luminaire (not by thermal insulation materials or other objects) and keep it away from open flames and external heat sources.
- Do not use the product in an environment beyond its operating temperature range: this will damage the lamp.
- Avoid looking directly into the LED beam, especially for extended periods. Do not shine the light in anyone's eyes.
- Keep packaging material away from children and pets (risk of suffocation, small parts). Never leave children unattended near the lights.
- Maintenance by trained professionals only. Unauthorised disassembly may void the after-sales service.
- After its service life the product needs an inspection or special treatment for disposal.