DATA SHEET

VARNALUX

LED BACK-LIT PANEL 60X60

36W | 120 LM/W | TUYA APP



APPLICATION

- Hotels
- Factories and offices
- Commercial purposes
- Residential and institution buildings
- Schools, colleges and universities
- Hospitals

AVAILABLE MODELS	
Variant	REF No
Adjustable (CCT)	100440

60x60 Length	36W	3600 lm	5 YEARS
CCT Colour	TUYA Control	- Class	WHITE Frame





DATA SHEET

LED BACK-LIT PANEL 60X60

36W | 120 LM/W | TUYA APP

GENERAL	
TUYA app	Supported

ELECTRICAL DATA	
Power (consumption)	36W
Driver	Varnalux
Cable length	20cm

PHOTOMETRICAL DATA	
Luminous flux	3600 lm
Colour temperature (Kelvin)	Adjustable (CCT)
Colour rendering index (CRI)	> 80
Beam angle	120°
LED brand	Varnalux

LIFESPAN & WARRANTY	
Warranty	5 years

AVAILABLE MODELS

Variant	REF No
Adjustable (CCT)	100440

DATA SHEET

VARNALUX

LED BACK-LIT PANEL 60X60

36W | 120 LM/W | TUYA APP

INSTALLATION

STEP 1 **Unpack and check**

Check the integrity of the product when unpacking. Installation must be done by a trained electrician.

STEP 2 **Check the distances**

Keep at least 0.2 m from flammable materials and at least 2 cm between the top of the light and the ceiling. No heat-insulating material around the light.

STEP 3 **Choose the mounting**

In-built (recessed), mounting (surface) or suspending, as shown in the supplier drawings. Fix surface-mounted lights with the pre-fitted clips, securely.

STEP 4 **Lay the cables**

Guide the connecting cables through the drilled hole. No tensile or twisting force on cables and plugs; fit the tension relief; do not kink cables.

STEP 5 **Connect the driver**

After installation connect the driver to the mains supply. Lay the output cables separately from other cables.

STEP 6 **Wire the mains**

The brown wire is live: connect it to terminal L. The blue wire is neutral: connect it to terminal N.

STEP 7 **Driver rules**

Use only the LED driver included. Do not connect the panel to other loads and do not remove the name plate of the driver.

STEP 8 **Switch on**


Switch on the mains supply and check the light output.

DATA SHEET

LED BACK-LIT PANEL 60X60

36W | 120 LM/W | TUYA APP

CONNECTION DIAGRAM

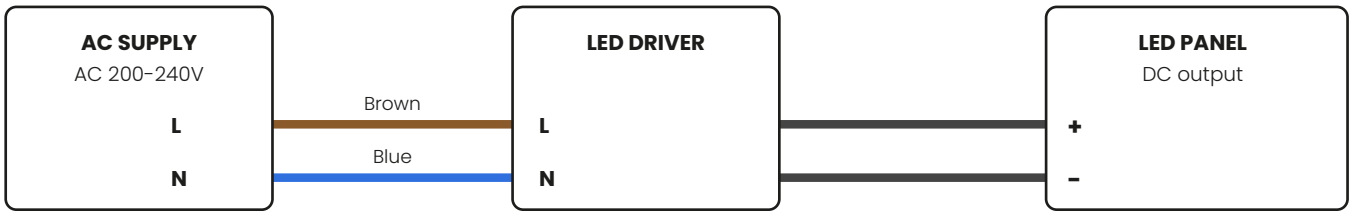

Use only the LED driver included with the panel.

SAFETY & MAINTENANCE:

- This product should be installed by trained electricians. Check the integrity of the product when unpacking it.
- Keep a distance of at least 0.2 m between the light and flammable materials and at least 2 cm between the upper part of the installed light and the ceiling.
- Do not install the light into ceilings or walls that contain heat-insulating material. The mains cable must not be connected with the low-voltage cable.
- Use only the LED driver included and do not connect the light to other loads. Do not remove the name plate of the power supply and the driver.
- Cleaning: disconnect the light from the power supply first. Use a dry or slightly moistened cloth; never use chemicals or abrasives.