
DATA SHEET

VARNALUX

LED BACK-LIT PANEL 60X60 SENSOR

28W | 150 LM/W | 4000K

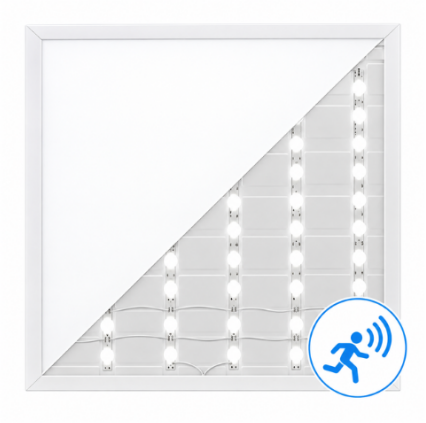


APPLICATION


- Hotels
- Factories and offices
- Commercial purposes
- Residential and institution buildings
- Schools, colleges and universities
- Hospitals

AVAILABLE MODELS

Variant	REF No
4000K	100802

595mm Length	28W	4200 lm	5 YEARS
CCT Colour	SENSOR Control	IP41	WHITE Frame

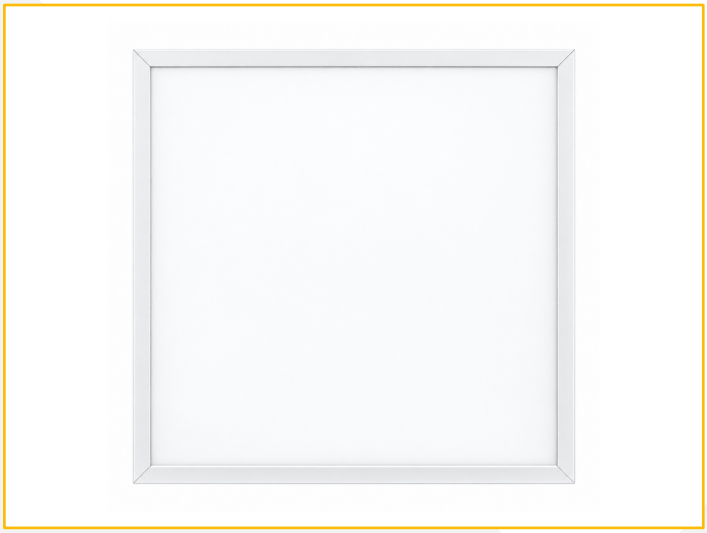

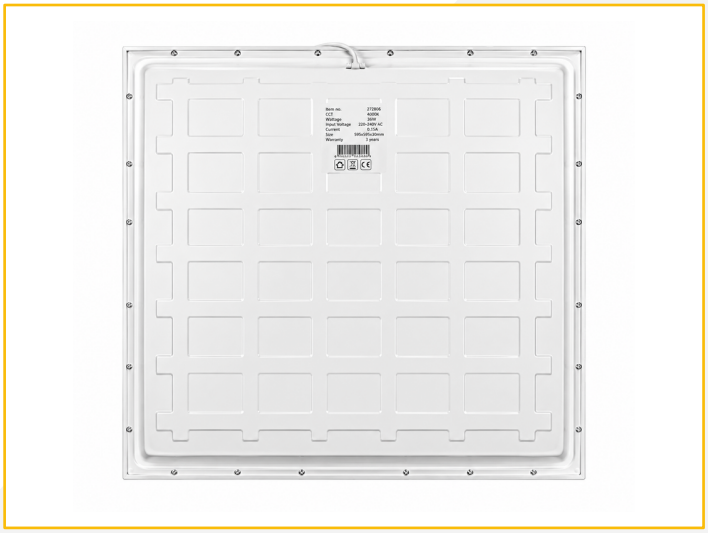

DATA SHEET

LED BACK-LIT PANEL 60X60 SENSOR

28W | 150 LM/W | 4000K

GENERAL	
Frame colour	White
Technology	Flicker-free
Dimensions	595 x 595 x 35 mm
Sensor	Microwave + Daylight Sensor

ELECTRICAL DATA	
Power (consumption)	28W
Driver	Varnalux
Input voltage	220-240V
Power factor	> 0.9


PHOTOMETRICAL DATA	
Luminous flux	4200 lm
Luminous efficiency	150 lm/W
Colour temperature (Kelvin)	4000K
Colour rendering index (CRI)	> 80
Beam angle	120°

LIFESPAN & WARRANTY	
Warranty	5 years

ADDITIONAL INFORMATION	
IP rating	IP41

AVAILABLE MODELS

Variant	REF No
4000K	100802

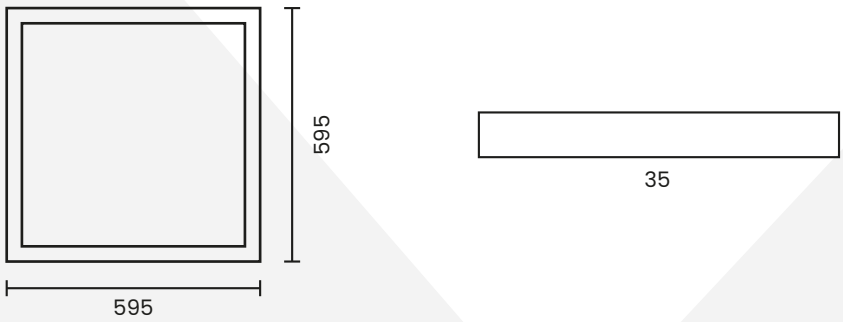

Schematic drawing, not to scale. Dimensions in mm.

DATA SHEET

VARNALUX

LED BACK-LIT PANEL 60X60 SENSOR

28W | 150 LM/W | 4000K

INSTALLATION

STEP 1 **Unpack and check**

Check the integrity of the product when unpacking. Installation must be done by a trained electrician.

STEP 2 **Check the distances**

Keep at least 0.2 m from flammable materials and at least 2 cm between the top of the light and the ceiling. No heat-insulating material around the light.

STEP 3 **Choose the mounting**

In-built (recessed), mounting (surface) or suspending, as shown in the supplier drawings. Fix surface-mounted lights with the pre-fitted clips, securely.

STEP 4 **Lay the cables**

Guide the connecting cables through the drilled hole. No tensile or twisting force on cables and plugs; fit the tension relief; do not kink cables.

STEP 5 **Connect the driver**

After installation connect the driver to the mains supply. Lay the output cables separately from other cables.

STEP 6 **Wire the mains**

The brown wire is live: connect it to terminal L. The blue wire is neutral: connect it to terminal N.

STEP 7 **Driver rules**

Use only the LED driver included. Do not connect the panel to other loads and do not remove the name plate of the driver.

STEP 8 **Switch on**

Switch on the mains supply and check the light output.


DATA SHEET

VARNALUX

LED BACK-LIT PANEL 60X60 SENSOR

28W | 150 LM/W | 4000K

CONNECTION DIAGRAM

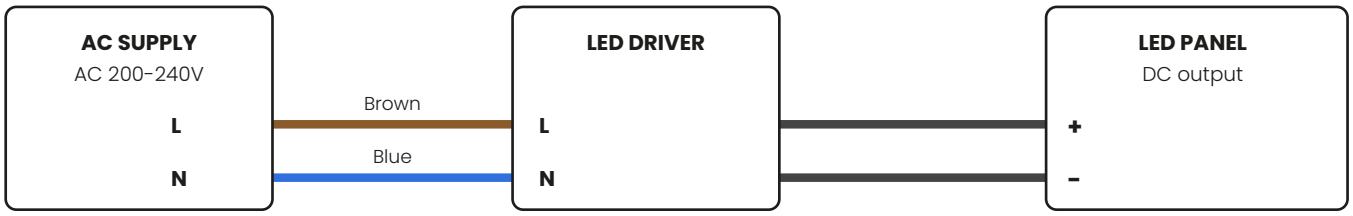

Use only the LED driver included with the panel.

SAFETY & MAINTENANCE:

- This product should be installed by trained electricians. Check the integrity of the product when unpacking it.
- Keep a distance of at least 0.2 m between the light and flammable materials and at least 2 cm between the upper part of the installed light and the ceiling.
- Do not install the light into ceilings or walls that contain heat-insulating material. The mains cable must not be connected with the low-voltage cable.
- Use only the LED driver included and do not connect the light to other loads. Do not remove the name plate of the power supply and the driver.
- Cleaning: disconnect the light from the power supply first. Use a dry or slightly moistened cloth; never use chemicals or abrasives.