DATA SHEET

VARNALUX

UFO LED HIGH BAY 150W

PHILIPS DRIVER | 0-10V DIMMABLE | IP65 | UFO DESIGN




APPLICATION

- Warehouses and logistics centers
- Factories and workshops
- Industrial halls
- Supermarkets and retail
- High-ceiling areas
- Exhibition halls and sports halls

AVAILABLE MODELS	
Color Temp	REF No
4000K	200051
5000K	200052
6000K	200053

Ø300mm | 150W | 200 lm/W | 5 YEARS | 4000-6000K | 0 10 0-10V | IP65 | CE

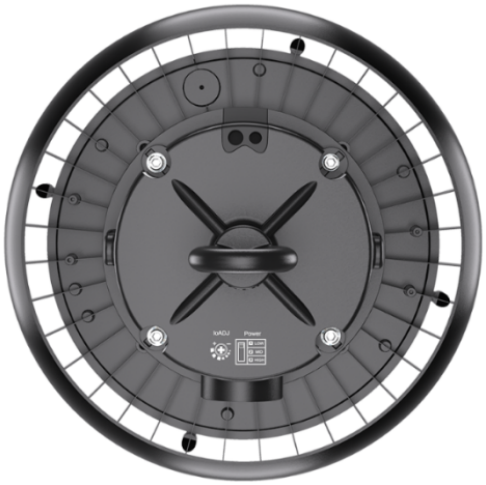



DATA SHEET

VARNALUX

UFO LED HIGH BAY 150W

PHILIPS DRIVER | 0-10V DIMMABLE | IP65 | UFO DESIGN

ELECTRICAL DATA	
Wattage (Consumption)	150W
Voltage	AC 200-240V
Max. current	0.75A
Constant current	0.53A
Power Factor	>= 0.95
Dimming	0-10V
Electrical class	Class I

PHOTOMETRICAL DATA	
Temperature (Kelvin)	4000K, 5000K or 6000K
Light color	Neutral or cool white
Luminous efficiency	200 lm/W
Lumen	31,500 lm (±10%)
Beam angle	90° (optional 60°)
Color Rendering Index (CRI)	> 80
Operating Temperature range	-20 °C to +50 °C

CAPABILITIES	
Dimmable	Yes, 0-10V
Optional beam optics	60°
Power adjustable	90W / 120W / 150W


LIFESPAN & WARRANTY	
Lifespan	50.000 hrs
Warranty	5 years


DIMENSIONS & PACKAGING	
Dimensions	Ø300 x H110 mm
Net weight	1.88 kg
Gross weight	2.1 kg
Inner box	1 piece
Outer box	4 pieces
Outer carton	685x345x320 mm

ADDITIONAL INFORMATION	
Driver	Philips
LED Chip	Lumileds/Sanan SMD2835
IP Rating	IP65
IK Rating	IK09
Housing	Aluminium + PC lens
Storage temp.	-30 °C to +60 °C
Certificates	CE & ROHS

AVAILABLE MODELS

Color Temp	REF No
4000K	200051
5000K	200052
6000K	200053



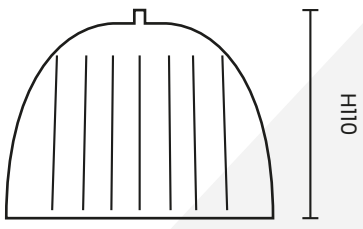

Schematic drawing, not to scale. Dimensions in mm.

DATA SHEET

VARNALUX

UFO LED HIGH BAY 150W

PHILIPS DRIVER | 0-10V DIMMABLE | IP65 | UFO DESIGN

USER MANUAL | HOW TO USE

STEP 1 **Unpack and check**

Open the box and take out the luminaire, the mounting bolt and the spring washer. Use the light out of its package and check it for damage caused by transport. If any damage is visible, do not install or use it.

STEP 2 **Turn off the power**

Switch off the mains supply before starting any work on the luminaire. Installation must be done by a professional electrician only.

STEP 3 **Mount the luminaire**

Tighten the mounting bolt and the spring washer to the fixture, then hang the luminaire securely from a suitable fixing point (hook, chain hoist or suspension rod). Never cover the luminaire with other objects.

STEP 4 **Connect the wires**

Connect the wires as shown in the wiring diagram on the next page: Brown = L, Blue = N, Yellow/Green = GND (earth). Supply: AC 200-240V.

STEP 5 **Set the power (optional)**

The output power can be selected with the switch on the driver: LOW, MID or HIGH (see the table on the next page). The default setting is the rated power of the model.

STEP 6 **Connect a dimmer (optional)**

For 0-10V dimming connect the dimmer to the Purple (Dim+) and Pink (Dim-) wires. The dimming wires are only needed when a 0-10V dimmer is used.

STEP 7 **Turn on the power**

Switch on the mains supply. Never touch the luminaire while it is switched on and never look directly into the LED beam for a long time.

STEP 8 **Maintenance**

Maintenance and repair must be done by trained professionals only. In case of damage to the power cable or the housing, stop using the luminaire.

PACKING INFO

In the box	1 x luminaire, 1 x mounting bolt, 1 x spring washer
Inner box	1 piece
Outer carton	4 pieces (685x345x320 mm), gross weight of 1 piece: 2.1 kg


DATA SHEET

VARNALUX

UFO LED HIGH BAY 150W

PHILIPS DRIVER | 0-10V DIMMABLE | IP65 | UFO DESIGN

WIRING DIAGRAM

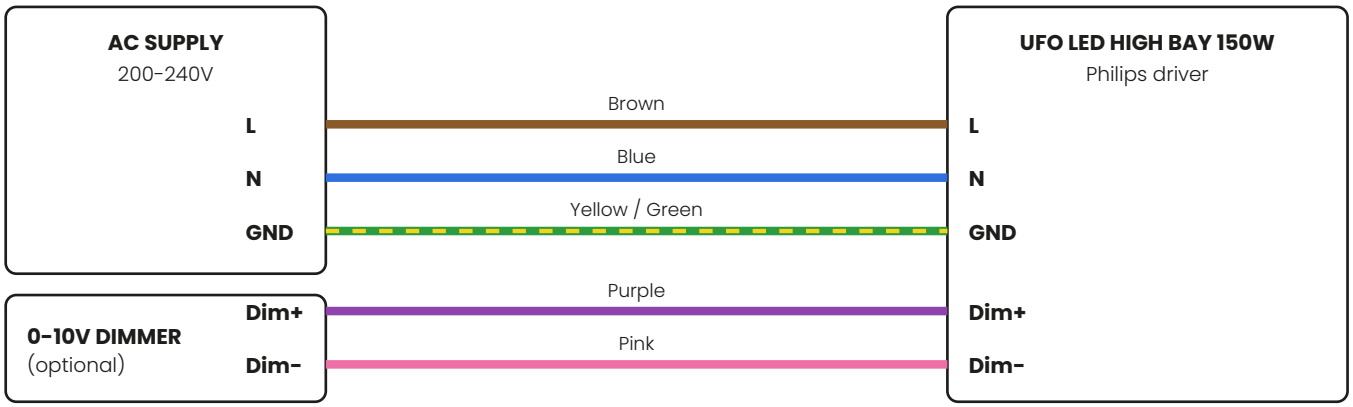

POWER ADJUSTMENT (SWITCH ON THE DRIVER)

Default power	1 LOW	2 MID	3 HIGH
150W	90W	120W	150W

SAFETY NOTICE:

- Installation must be done by a professional electrician only; non-professionals must not install, disassemble or connect wires (high voltage).
- If the power cable or the housing is damaged, the product must not be used.
- Use the light out of its package and check it for transport damage before installation.
- Never cover the luminaire and keep it away from open flames and external heat sources.
- Avoid looking directly into the LED beam, especially for extended periods. Do not shine the light in anyone's eyes.
- Keep packaging material away from children and pets (risk of suffocation, small parts). Do not let children play near the luminaire.
- Maintenance by trained professionals only. Unauthorised disassembly may void the after-sales service.
- After its service life the product needs an inspection or special treatment for disposal.