DATA SHEET

VARNALUX

LED TRI-PROOF HOUSING 60CM

IP65 | FOR T8 LED TUBES | LINKABLE | 24W




APPLICATION

- Industrial areas
- Parking garages
- Warehouses and storage rooms
- Damp and dusty rooms
- Corridors and utility areas

AVAILABLE MODELS

Variant	REF No
Single	100523
Double	100524

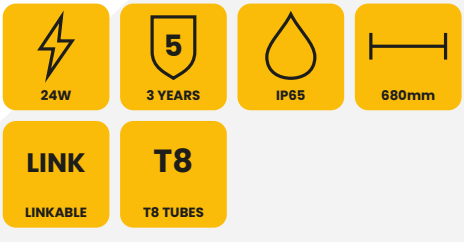

KEY FEATURES

- 24W tri-proof housing, IP65 protection
- Single and Double variants
- Linkable on both sides via cable glands
- 3 years warranty

AVAILABLE VARIANTS

SINGLE
REF 100523
Width 63 mm

DOUBLE
REF 100524
Width 112.5 mm

DATA SHEET

VARNALUX

LED TRI-PROOF HOUSING 60CM

IP65 | FOR T8 LED TUBES | LINKABLE | 24W

PRODUCT INFORMATION	
Product type	Tri-proof housing for T8 LED tubes
Configurations	Single / Double

ELECTRICAL DATA	
Wattage (Consumption)	24W


LIFESPAN & WARRANTY	
Warranty	3 years

DIMENSIONS	
Housing length	680 mm
Width (Single)	63 mm
Width (Double)	112.5 mm
Height	63 mm

ADDITIONAL INFORMATION	
IP Rating	IP65

AVAILABLE MODELS

Variant	REF No
Single	100523
Double	100524



Schematic drawing, not to scale. Dimensions in mm.

DATA SHEET

VARNALUX

LED TRI-PROOF HOUSING 60CM

IP65 | FOR T8 LED TUBES | LINKABLE | 24W

USER MANUAL | HOW TO USE

STEP 1 **Unpack and check**

Take the fixture out of the packaging and check it for damage. If any damage is visible, do not install or use it.

STEP 2 **Turn off the power**

Switch off the mains supply before starting any work on the fixture. Installation must be done by a professional electrician only.

STEP 3 **Mount the fixture**

Fix the housing securely to a suitable flat surface with fixings suited to the fixture and the surface. Never cover the fixture with other objects.

STEP 4 **Connect the cable**

Lead the supply cable through the cable gland. For series installation, link the fixtures on both sides via the cable glands. Tighten the glands to keep the IP65 protection.

STEP 5 **Close and turn on**

Insert compatible T8 LED tube(s) where applicable (1 for Single, 2 for Double), close the cover and secure the clips. Switch on the mains supply.

STEP 6 **Maintenance**

Maintenance and repair by trained professionals only. In case of damage to the cable or the housing, stop using the fixture.

SAFETY NOTICE:

- Installation must be done by a professional electrician only; non-professionals must not install, disassemble or connect wires.
- If the cable or the housing is damaged, the product must not be used.
- Close the cover and tighten all cable glands correctly; the IP65 protection only applies when the fixture is closed properly.
- Never cover the fixture and keep it away from open flames and external heat sources.
- Avoid looking directly into the light source for extended periods.
- Keep packaging material away from children and pets.